

Overview

PowerPhotonic's range of slow axis collimator optics with smile correction (SmileSAC) is unique in the industry. They are used to simultaneously reduce the slow axis divergence and smile error of a diode laser. The SmileSACs consist of a monolithic array of cylindrical lenses with additional smile error correction in a single optic. They are available in a range of standard focal lengths, pitch combinations and smile error correction options.

PowerPhotonic's SACs with smile correction are manufactured using the company's patent pending laser micro-machining process, which provides unparalleled performance and flexibility.


They are compatible with many different laser bars and stacks, and can be specified in systems with consistent smile errors or selected at production test.

Key Features

- Monolithic design
- Efficient collimation
- Transmission >99%
- Long term mechanical stability
- Built in smile correction
- UV-fused silica

Benefits


- Optimize VBG efficiency and locking range
- Compatible with off-the-shelf FACs
- Suitable for laser diode stack assembly
- Flexible part size
- Reduced assembly size with two optics combined into one
- Low scatter

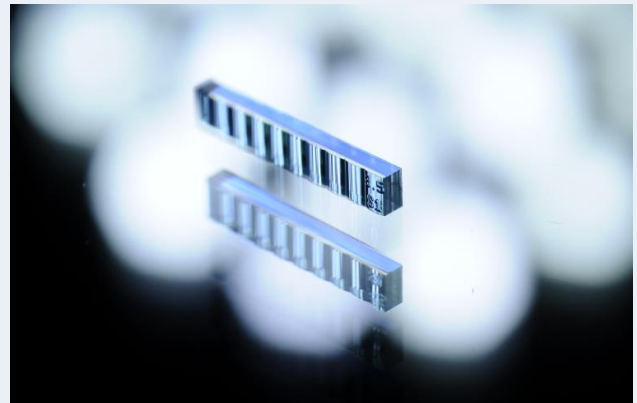

Target Applications

- High power laser diode bars stacks
- Solid-state laser end pumping
- Wavelength-locked systems
- Fiber-coupled direct diode
- Free-space direct diode

How it is Used

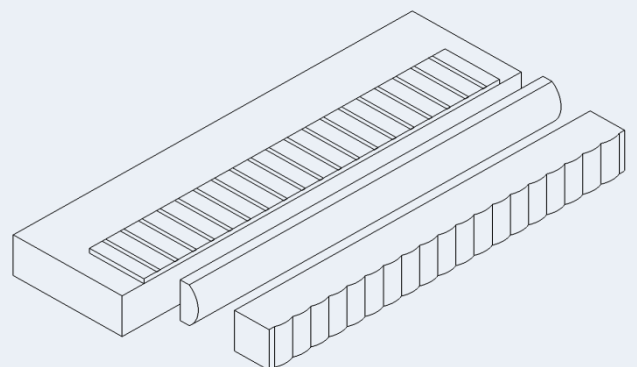

Standard Product Selection

Part Number	NA	Focal Length EFL (mm)	Pitch P (mm)	Length L (mm)	Height H (mm)	Thickness T (mm)	# Emitters	Smile P-V (mrad)
PP-SAC-F220-P50-S5-V1-AR1	0.10	2.20	0.50	12.0	1.50	1.00	19	0.5
PP-SAC-F220-P50-S10-V1-AR1	0.10	2.20	0.50	12.0	1.50	1.00	19	1.0
PP-SAC-F220-P50-S20-V1-AR1	0.10	2.20	0.50	12.0	1.50	1.00	19	2.0
PP-SAC-F220-P50-S30-V1-AR1	0.10	2.20	0.50	12.0	1.50	1.00	19	3.0
PP-SAC-F400-P50-S10-V1-AR1	0.06	4.00	0.50	12.0	1.50	1.00	19	1.0
PP-SAC-F400-P50-S20-V1-AR1	0.06	4.00	0.50	12.0	1.50	1.00	19	2.0
PP-SAC-Fxxx-Pxx-Sxx-Vx-ARx	tbd	tbd	tbd	tbd	tbd	tbd	tbd	tbd

AR1 optical coating: Broadband 900-1100nm R<0.25% , other coatings on request

NA: Numerical aperture

EFL: Effective focal length @ 808 nm


P: Pitch of emitter

All tbd parameters can be customer specified

L: Length (+/-0.10 mm)

H: Height (+/- 0.05 mm)

T: Thickness (+/- 0.02 mm)

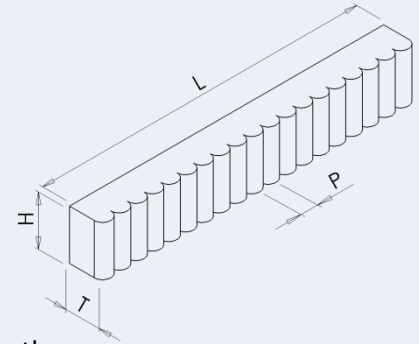

Customization Program

Due to the unique nature of the PowerPhotonic manufacturing process, our standard products can be easily modified to meet specific requirements. Please contact the factory for additional information.

Options

- Effective Focal length
- Pitch, Length, Height, Thickness
- Number of emitters
- Coatings
- Different Smile correction
- Collimation of complete stack

About Us

PowerPhotonic is a global leader in precision laser machined micro-optics products. Our business was founded with the objective of providing unsurpassed excellence in all aspects of design and manufacture of micro-optics for optical and laser applications. Our world-class design skills are supported by an innovative and flexible manufacturing process that allows the company to design both a broad range of state-of-the-art standard micro-optics products and uniquely, to offer a low cost and rapid fabrication service for creating completely freeform optical surfaces.

For Sales and Technical Support

United Kingdom

PowerPhotonic Ltd.
1 St. David's Drive
Dalgety Bay, Fife
KY11 9PF
United Kingdom

Tel: +44 1383 825 910
Fax: +44 1383 825 739

sales@powerphotonic.com

North America

PowerPhotonic, Inc.
4900 Hopyard Road
Suite 100
Pleasanton, California 94588
USA

Tel: +1 925 400 7644
Fax: +1 925 475 7422

sales@powerphotonic-us.com