TiF-100. Ti:Sapphire Femtosecond Solid-State Oscillator

- Wavelength range as broad as 715-1040 nm
- Pulse duration <100 fs
- Output power >3 W
- Thermostabilized monolithic sealed body
- PC-controlled wavelength tuning
- Automatic mode-locking
- Built-in spectrometer/power meter (optional)
- Tunable fs/CW switchable regimes (optional)
- Active power locking (optional)

The TiF-100ST-F10 femtosecond Ti:Sapphire laser with an integrated 10-W pump source

Product overview

The TiF-100 laser system offers the highest average power and the broadest tuning range in the TiF laser family. The system emits spectrally-limited pulses with a duration shorter than 100 fs at 800 nm. Among the TiF series lasers, this model has the highest average output power, both in the pulsed femtosecond mode and in the continuous wave mode with a narrow linewidth. The unit is a flexible tool suitable for numerous applications and can really be a workhorse for many different projects going on simultaneously. The system can be supplied as a stand-alone version for pumping by an external pump laser or as a version with an industry-standard pump laser integrated on site or at our factory. However, the dimensions of the Ti:S laser head are the same for either version, the stand-alone version may later be fitted with an integrated pump laser at minimum additional cost. The acceptable pump laser power for the TiF-100 is up to 18 Watts. See tuning curves in the datasheet for output power vs. wavelength dependence.

There are three pre-designed factory supply packages:

- the 'Manual' factory package includes a push-button non-automatic electric starter and allows manual tuning of the wavelength and pulse duration setting by using micrometer screws placed on the side walls of the laser box.


- the 'Basic' factory package includes a simple USB motorized wavelength tuning slit and a push-button non-automatic electric starter. Wavelength tuning and calibration with this package is done via step number information in basic Windows software.

- the 'Auto' factory package includes a built-in spectrometer and power meter, single-touch wavelength tuning with presets, configurable widget software, active power lock function and automatic mode-lock start and monitoring. With this package the system boasts exceptional long-term stability and longer uninterrupted runtime.

The system can also be equipped with an optional birefringent filter and optional etalons providing narrowband tunable CW regime over the whole tuning range.

An external prism pair or a tunable pulse compressor (the APC Kit or APC Pro units) for dispersion pre-compensation is also available.

The monolithic thermostabilized body of the TiF-100 provides excellent passive stability of the output radiation parameters.

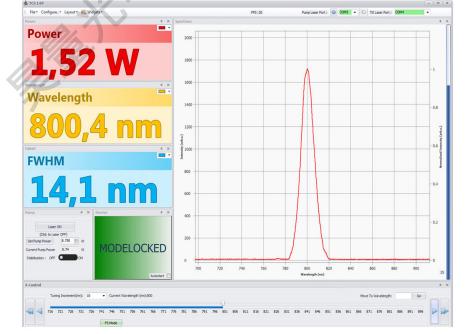

Control software for "Auto" version of TiF-100 laser

Possible applications of the TiF Series lasers:

- Multiphoton microscopy
 Seed oscillator for amplifier systems
 Terahertz generation
 "Pump-probe" spectroscopy
- Material processing
 Optical coherent tomography
 Semiconductor Device Characterization
 Fundamental Research



Technical specifications

Standard models and available pump laser power matrix				
		ard wavelength range) TiF-100LW (extended IR range)		ended IR range)
Pump laser power	Wavelength tuning	Output power ¹⁾	Wavelength tuning	Output power
4W	735-870 nm	>500 mW	n/a	n/a
5 W		>650 mW		
	730-875 nm		830-950 nm	>200 mW at 950 nm
6 W	725-880 nm	>850 mW	830-960 nm	>200 mW at 960 nm
8 W	720-885 nm	>1.25 W	830-970 nm	>200 mW at 970 nm
10 W	715-890 nm	>1.55 W	830-980 nm	>150 mW at 980 nm
18 W	720-950 nm	>3 W	850-1040 nm	>200 mW at 1040 nm
It might be possible to corr	nbine both ranges in a singl	le laser system, please enquire for d		ngs available on request.
General optical specifications				
Output pulse duration ¹⁾		<100 fs		
Spectrum width ¹⁾ (FWHM)		>8 nm		
Pulse repetition rate (fixed)		80±10 MHz		
Pump laser		integrated or stand-alone DPSS 500550 nm low-noise laser (up to 18 W)		
Beam mode		TEMoo (M^2 <1.2)		
Beam diameter (at 1/e^2)		<2 mm		
Output polarization		linear, horizontal, PER >20 dB		
Beam divergence		<1 mrad		
Long-term stability ²⁾		<0.2% rms		
Noise ³⁾		<0.1% rms		
		Physical dimensions (L × W ×	< H)	
Laser head		$516 \times 350 \times 118$ mm (including an integrated pump laser with up to 12 W power) $615 \times 402 \times 133$ mm (including an integrated 18-W pump laser)		
Pump laser control unit		353 × 360 × 119 mm		
Closed-loop chiller		430 × 440 × 190 mm (4U 19")		
	Env	vironmental and utility specifi	cations	
		15-30°C		
Relative humidity		<60%, non-condensing		
Voltage		single-phase; 100-240 VAC; 50/60 Hz		
Power consumption		<2 kW		
		Available configuration packa	aes ⁴⁾	
Thermally stabilized m		included in any package	.900	
Pulse train SMA output	-	included in any package		
'Auto' factory package		 built-in spectrometer single-touch wavelength tuning w. presets built-in power meter active output power stability locking Windows software with configurable widgets automatic mode-lock start and monitoring PC requirements: USB 2.0 port, Windows 10 		
'Basic' factory package (default)		- push-button starter - USB 2.0 wavelength tuning via step-motor slit (via step position calibration) PC requirements: USB 2.0 port, Windows 10		
'Manual' factory package		- push-button starter - manual wavelength tuning slit		
1) - when tuned to 800 nm	central wavelenath:			


1) - when tuned to 800 nm central wavelength;

2) - after 30 min warm-up with cold start, during 12-hour continuous operation under equal room temperature conditions using recommended stabilized closed-loop chiller with proper capacity and recommended low-noise on-board integrated highly stable pump laser with active power locking;


3) - measured from 10 Hz to 10 MHz;

4) - please select one of the packages for your system; certain features may be tailored or combined differently according to specific customer requirements.



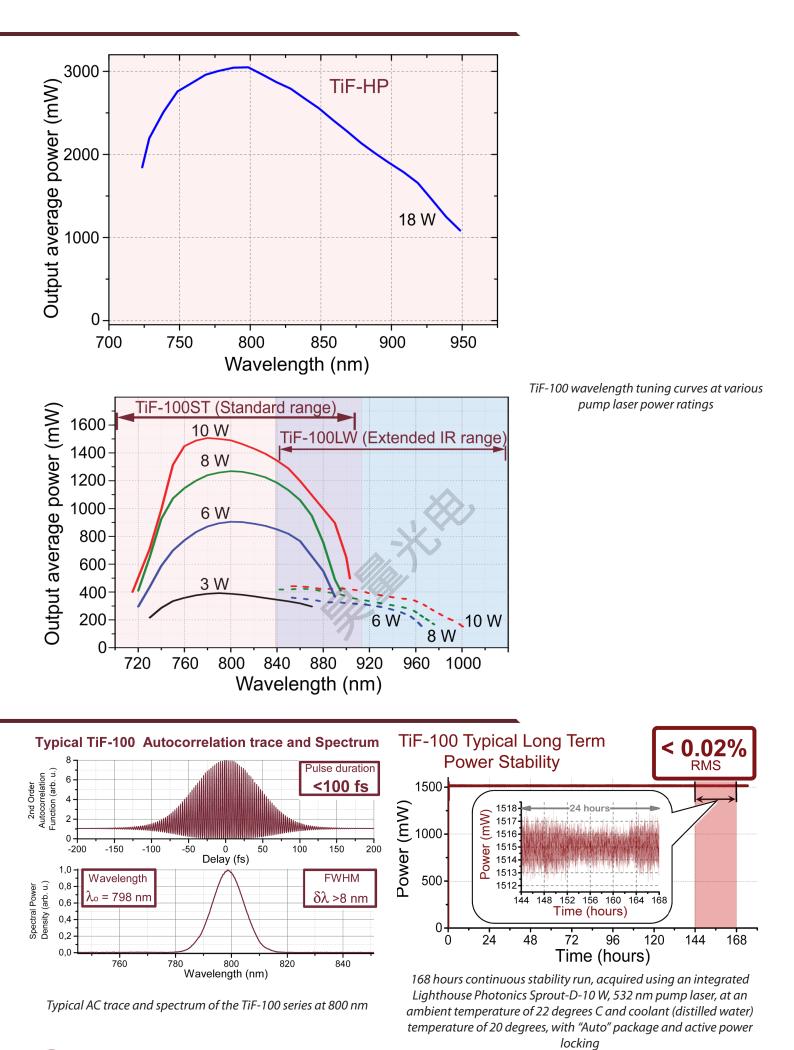



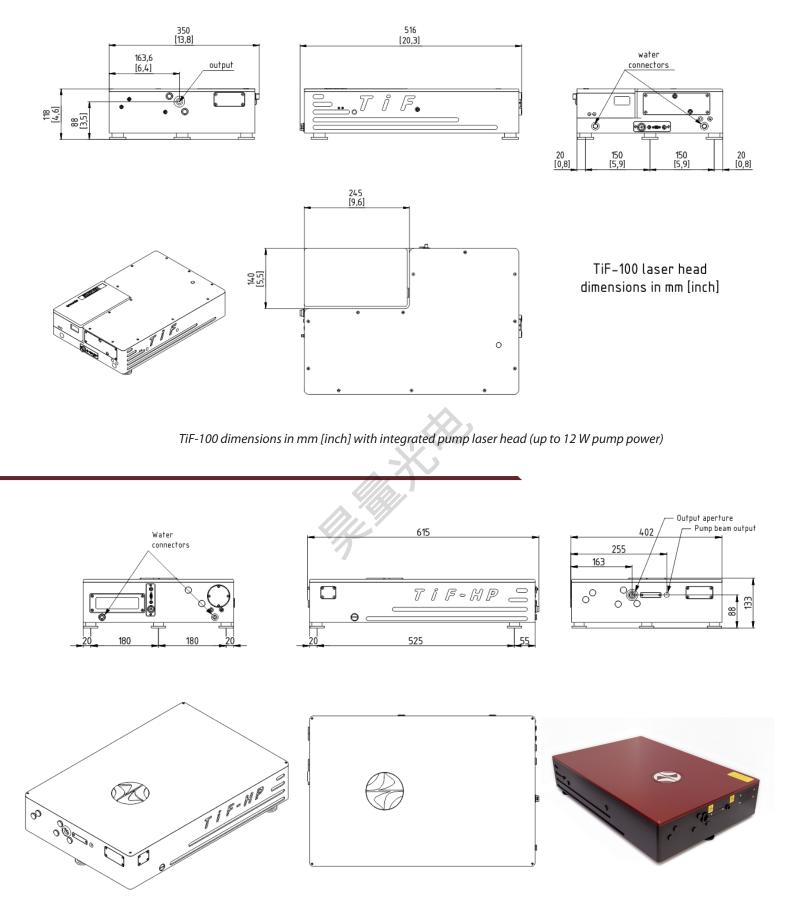


TiF-100 dimensions in mm [inch] with integrated 18-W pump laser






Installed TiF-100 systems at customers' sites

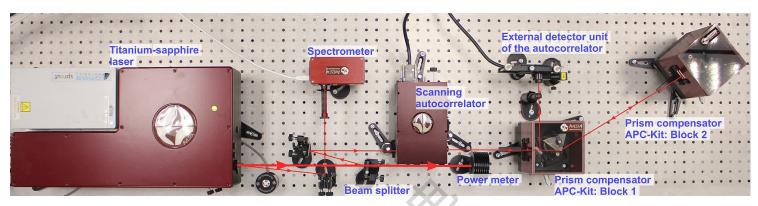

Possible total dispersion control setup for multi-photon microscopy applications with TiF Series laser, APC Kit dispersion compensator and AA-M scanning autocorrelator with an external detector unit

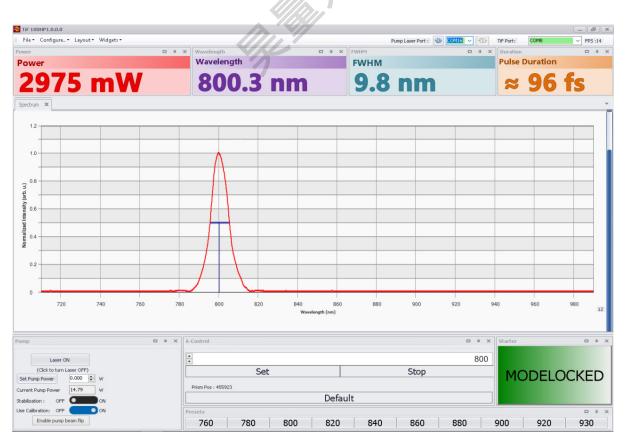

The TiF-100ST-F18 software at 3 W output power

